


Premium Series 303VS/303BMJ Single Lift Out Slider



2015 2014

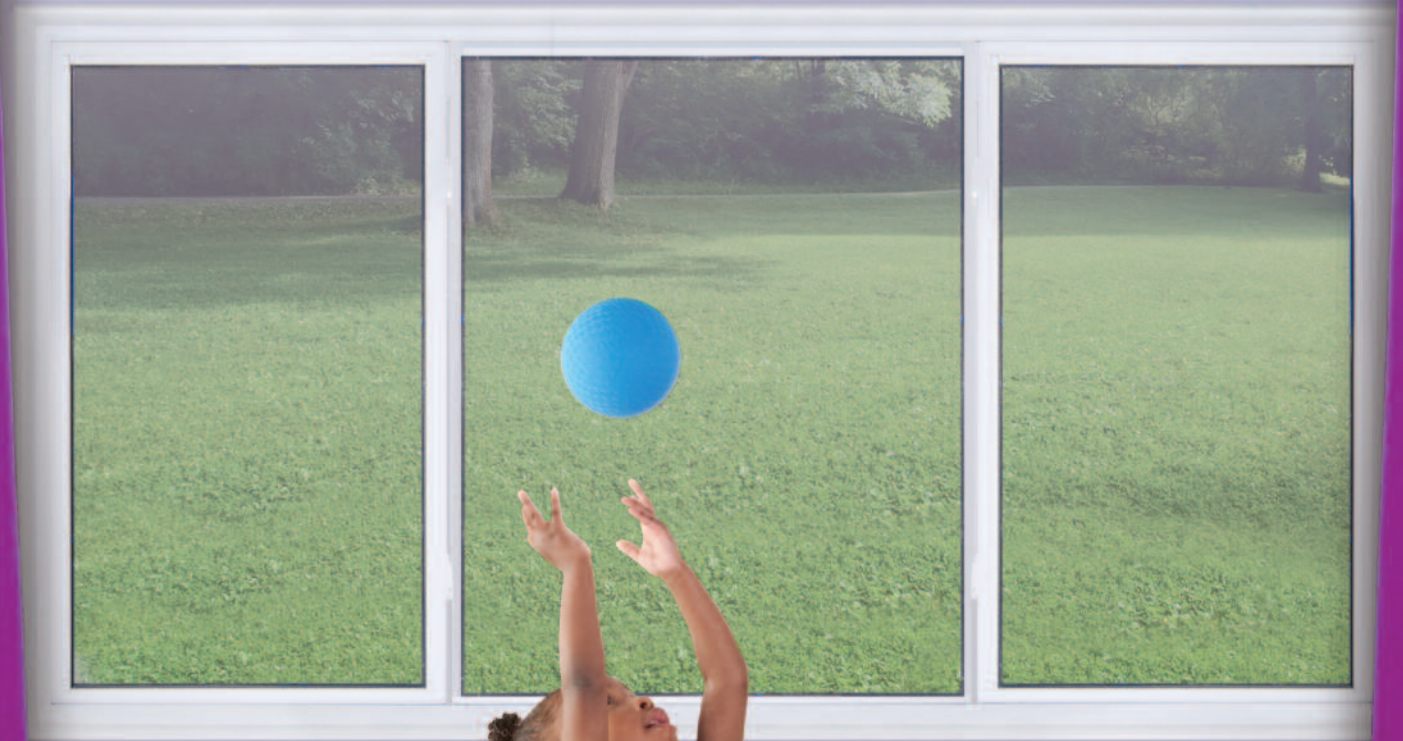

ENERGY STAR
HIGH EFFICIENCY
HAUTE EFFICACITÉ

Sustained Excellence



ENERGY STAR
HIGH EFFICIENCY
HAUTE EFFICACITÉ

Promoter of the Year
ENERGY STAR Most Efficient



ENERGY STAR
PARTICIPANT



9 consecutive years
2006 - 2015



"You'll appreciate the quality we build into every window!"




frame **THE VINYL COMPANY**
QUALITY EXTRUDERS SINCE 1998

glass **Stainless** **The TempSmart[™] Spacer System** **IGMA** INSULATING GLASS MANUFACTURER ALLIANCE

VERSATILE & FLEXIBLE

For new homes, these windows are built to your individual needs with optional nailing fin and brick mould, with jamb returns and frame extensions to fit your type of wall construction.

- **Fusion Welded Frame and Sash**
Welding creates a fully sealed, continuous profile that eliminates potential air and water penetration through frame and sash corners.
- **Maintenance Free Solid uPVC Vinyl Profiles**
The multi-chambered design provides structural strength as well as insulating air pockets which reduce heat and cold transfer.
- **Integral Pull Rail**
Permits the single sash to be operated with ease.
- **Built-in Water Management Systems**
Carefully engineered independent drain allows for quick water management to the exterior.
- **Integral Brick Mould with Nail Fin**
Ideal for brick and siding applications, offering cleaner details and improved performance (303BMJ only).



Window Ratings

AAMA/WDMA/CSA101/1.S.2/A440-08
HS-R50 Grade 10 • CSA A-440-00 A2/Fixed, B3, C3, F20, S1
Energy Rating: +31* • U Value: 0.28(1.59)*
Energy Rating: +40 • U Value: 0.18(1.02)*
(Triple glazed with Low E and Krypton Gas and a warm edge spacer)
AAMA Certified • NFRC Certified • ENERGY STAR® Qualified
Window Wise Certified
USA ENERGY STAR 2016 U.29 SHGC .56

**Single Lift Out Slider
Style 303VS/303VSJ**

Width: Min 18" Max 72"
Height: Min 12" Max 50"

NOTE: If Height is between 12" and 13", width can be no less than 22"

Maximum size with Triple Glass or Keepsafe is 18 sq. ft.

* Tested with Low E, Gas fillings and a warm edge spacer. *Ask your dealer for details of glass requirements.


**Double End Vent
Style 303VSEV/303VSJEV**

Width: Min 42" Max 120"
Height: Min 12" Max 50"

Widths less than 56" must be 1/3, 1/3, 1/3
Widths over 108" must be 1/4, 1/2, 1/4

hardware

- **Triple Seal**
Three layers of premium Fin Seal stop air and water as they reduce sound transmission. Benefit from the best sliding seals available!
- **Double Neoprene Bulbs**
Compression style seals close tight where the sash meets the frame and sliding is not required. Our engineers insisted that you get this premium component!
- **Recessed Tilt Latches**
Your operating sash is designed for easy removal when cleaning. Pull down the top tilt style latches and lift out the sash!
- **Cam Locks**
Heavy duty 180 degree locking cams pull your operating sash and frame tightly together for a great seal!
- **Hinged Drain Covers**
Designed to keep bugs out while allowing water to flow to the outside.



Wide Selection of Styles and Configurations



Optional Internal grills for beauty and distinction.

As we are constantly improving our products, specifications may have changed from those herein. Please contact VWD regarding up-to-date specifications.



Authorized Distributor

